


NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

NPSNET VEHICLE DATABASE:
AN OBJECT-ORIENTED DATABASE
IN A REAL-TIME VEHICLE SIMULATION

by

Susan C. Borden Davis

June, 1996

Thesis Advisor:
Co-Advisor:

Michael J. Zyda
David R. Pratt

Approved for public release; distribution is unlimited.

Thesis
B7142

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93943-5101

REPORT DOCUMENTATION PAGE

Form Approved

OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE
June 19963. REPORT TYPE AND DATES COVERED
Master's Thesis

4. TITLE AND SUBTITLE

NPSNET Vehicle Database: An Object-Oriented
Database in a Real-Time Vehicle Simulation

5. FUNDING NUMBERS

6. AUTHOR(S)

Susan C. Borden Davis

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

8. PERFORMING ORGANIZATION
REPORT NUMBER

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

10. SPONSORING/MONITORING
AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

The views expressed in this thesis are those of
the author and do not reflect the official policy or position of the
Department of Defense or the U.S. Government.

12a. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release; distribution is
unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The Naval Postgraduate School has actively explored the design and implementation of NPSNET, a real-time three-dimensional simulator on low-cost, readily accessible workstations. NPSNET involves a tremendous amount of interaction between vehicle, terrain, obstacle and ordnance objects in a dynamic simulation system. There exists a need for an organized, efficient storage structure that allows real-time retrieval of objects and their interactive relationships.

This work concentrates on selection and design of a vehicle database model to maximize storage and real-time retrieval of data for the NPSNET visual simulator. The results of this effort can be applied to the overall system, NPSNET, in a distributed database management system.

14. SUBJECT TERMS

database model, NPSNET, object-oriented

15. NUMBER OF PAGES

80

16. PRICE CODE

17. SECURITY CLASSIFICATION
OF REPORT

UNCLASSIFIED

18. SECURITY CLASSIFICATION
OF THIS PAGE

UNCLASSIFIED

19. SECURITY CLASSIFICATION
OF ABSTRACT

UNCLASSIFIED

20. LIMITATION OF ABSTRACT

UL

Approved for public release; distribution is unlimited

**NPSNET VEHICLE DATABASE:
AN OBJECT-ORIENTED DATABASE
IN A REAL-TIME VEHICLE SIMULATION**

Susan C. Borden Davis
Lieutenant Commander, United States Navy
B.S., United States Naval Academy, 1984

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN COMPUTER SCIENCE

from the

NAVAL POSTGRADUATE SCHOOL
June 1996

ABSTRACT

The Naval Postgraduate School has actively explored the design and implementation of NPSNET, a real-time three-dimensional simulator on low-cost, readily accessible workstations. NPSNET involves a tremendous amount of interaction between vehicle, terrain, obstacle and ordnance objects in a dynamic simulation system. There exists a need for an organized, efficient storage structure that allows real-time retrieval of objects and their interactive relationships.

This work concentrates on selection and design of a vehicle database model to maximize storage and real-time retrieval of data for the NPSNET visual simulator. The results of this effort can be applied to the overall system, NPSNET, in a distributed database management system.

TABLE OF CONTENTS

I.	INTRODUCTION.....	1
A.	BACKGROUND.....	1
1.	NPSNET.....	1
2.	NPSNET Vehicles.....	2
B.	PURPOSE AND GOALS OF WORK.....	4
C.	BREAKDOWN OF WORK.....	5
II.	NPSNET VEHICLE INTERACTION EXAMPLES.....	7
A.	INTERACTION WITH TERRAIN.....	7
B.	INTERACTION WITH OBSTACLES AND VEHICLES...	8
1.	Interaction with Obstacles.....	9
2.	Interaction with Vehicles.....	10
C.	INTERACTION WITH ORDNANCE.....	10
III.	DATABASE EVOLUTION.....	13
A.	HISTORICAL PERSPECTIVE.....	13
B.	TRADITIONAL DATA MODELS.....	14
1.	Hierarchical Data Model.....	15
2.	Network Data Model.....	17
3.	Relational Data Model.....	18
C.	OBJECT DATA MODEL.....	21

IV. PROPOSED NPSNET VEHICLE DATABASE.....	27
A. NPSNET_V: DATA MODEL OVERVIEW.....	27
B. NPSNET_V: DATA MODEL DESIGN.....	28
1. Identify the Basis.....	30
2. Define the Requirements.....	31
3. Identify the Data Items.....	33
4. Separate the Data Members from the Classes.....	34
5. Build Data Member Dictionary.....	37
6. Gather Data Members into Classes.....	38
7. Identify the Key Members.....	44
8. Identify Class Relationships.....	46
9. Identify the Methods.....	47
10. Make the Class Persistent.....	48
C. NPSNET_V: DATA MODEL IMPLEMENTATION.....	49
1. Define NPSNET_V Database.....	50
2. Bring NPSNET_V Together.....	51
V. CONCLUSION.....	53
A. RESULTS.....	53
B. RECOMMENDATIONS.....	54
APPENDIX.....	57
GLOSSARY.....	61
REFERENCES.....	65
INITIAL DISTRIBUTION LIST.....	67

LIST OF FIGURES

Figure 3.1	-	A Hierarchical Database.....	16
Figure 3.2	-	A Network Database.....	17
Figure 3.3	-	A Relational Database.....	19
Figure 3.4	-	A Many-to-Many Relationship.....	20
Figure 3.5	-	A Class Hierarchy.....	23
Figure 3.6	-	A Land_Vehicle Class Hierarchy.....	24
Figure 4.1	-	Ten Basic Object Database Design Steps...	29
Figure 4.2	-	Object Database Design Step 1: Identify the Basis.....	31
Figure 4.3	-	Object Database Design Step 2: Define the Requirements.....	32
Figure 4.4	-	Object Database Design Step 3: Identify the Data Items.....	34
Figure 4.5	-	Refined List of NPSNET_V Data Items.....	35
Figure 4.6	-	Object Database Design Step 4: Separate the Data Members from the Classes.....	36
Figure 4.7	-	Object Database Design Step 6: Gather Data Members into Classes.....	39
Figure 4.8	-	The MK_46 Class.....	41
Figure 4.9	-	The SH_60B Class.....	42
Figure 4.10	-	The DDG_51 Class.....	43
Figure 4.11	-	The Assignment Class.....	44
Figure 4.12	-	Object Database Design Step 9: Identify the Methods.....	47
Figure 4.13	-	Expanded list of NPSNET_V Class Methods..	48

ACKNOWLEDGEMENT

Many thanks to Drs. Zyda and Pratt for their most excellent NPSNET adventure, and especially to my family for their tenacious support, and to my mother, whose spirit guided me through to completion.

I. INTRODUCTION

This work covers the selection and design of a database model to store and retrieve data for NPSNET, a real-time vehicle and battle simulator. NPSNET is a multiple year effort started in early 1990 as a newer version of the older, more expensive SIMNET project. It explores the SIMNET domain using readily available IRIS graphics workstations rather than platform specific nodes, and provides a real-time interface with the user for virtual world exploration and experimentation [Osbo91]. Maximizing storage and real-time data retrieval for the simulator can lead to development of a viable distributed database system.

A. BACKGROUND

1. NPSNET

NPSNET is a real-time vehicle and battle simulator capable of displaying vehicle movement over the ground, in the air or through water. While NPSNET supports a full complement of land, air and sea vehicles, it also provides the mediums through which these vehicles move. It models terrain features such as soil type, water masses, vegetation and elevation, and can effect environmental conditions including coastal fog or urban haze. NPSNET incorporates the cultural features of roads, buildings, signs and other fixed objects to fully immerse the user into its simulated world.

The NPSNET user selects a vehicle from a field of realistic craft, fanciful flying cows, turkeys or tomato tanks, and controls its movement via a six degree of freedom spaceball or button/dialbox associated with a command and control screen. Up to 500 vehicles may interact in the virtual world at a given time, including autonomously scripted vehicles or vehicles controlled by other users networked to the system. As NPSNET constructs a three-dimensional virtual world in which to move and interact, it pursues training, planning, gaming and other purposes where the introduction of a physical player may be too hazardous, too expensive or too frivolous to tolerate [Zyd92].

2. NPSNET Vehicles

NPSNET engages to totally immerse the user in its real-time vehicle combat simulation. The graphics representing the virtual world respond to the actions and movements of the user and convince the user that they truly are within the environment that the simulator represents [Zyda93]. With this long-term goal in mind, NPSNET supports a full complement of land, air and sea vehicles capable of simulated movement over ground, in air or through water. It models the mediums through which these vehicles move with terrain features, and incorporates the fixed objects around which these vehicles move with cultural features, or obstacles. NPSNET represents vehicle armament with ordnance features, adding accurate aural cues to provide feedback

about the user's vehicle, environment and actions taking place.

The NPSNET user chooses a vehicle by making a mouse selection on a command and control screen. Each vehicle is actually a low resolution indicator of a player on the terrain. Its three-dimensional icon displays a minimum level of graphical detail with which the NPSNET user is willing to live [Zyd92].

An NPSNET vehicle operates in an environment of gridsquares, with up to 500 vehicles interacting in the virtual world at a given time. Interactions may involve vehicles controlled by prewritten script, vehicles driven interactively from other workstations in the network and autonomous vehicles introduced into the system via a programmable network "harness" process [Zyda92]. A two-dimensional map on the command and control screen displays the position and tracking of all players attached within a gridsquare, as well as the direction and scope of the user's vehicle and the position and movement of the other vehicles.

The user accesses additional data through a window at the top of the viewing screen. For instance, the window may display the speed, direction and attitude of the engaged vehicle, its remaining ordnance and current fuel level. The user should ultimately be able to access all data pertinent to any vehicle or related object within the virtual world, expanding the tutorial capacity of the simulation.

Players control their chosen vehicle using a variety of interface devices, including a keyboard, a button/dialbox and a six degree of freedom spaceball. The latter is an extremely versatile device for control of three-dimensional movement, facilitating quick user action.

Real-time NPSNET representation relies on rapid event detection and reaction, including reacting to user input, following terrain contours, and responding to changes in the three-dimensional world [Osbo91]. Real-time combat simulation also relies on rapid detection of, and response to, interaction between land, air and sea forces. Chapter II of this work covers NPSNET vehicle interactions, along with a discussion of collision detection and response.

B. PURPOSE AND GOALS OF WORK

Current NPSNET data storage and retrieval mechanisms are slow, cumbersome to maintain and complex to enhance. As NPSNET proceeds in the direction of object-oriented modeling and real-time scene management over a multiple workstation network, its data management system must also progress. NPSNET requires an updated database facility to support the demands involved in real-time vehicle combat simulation. Dynamic terrain and ballistic motion issues, intelligent autonomous agents, a three-dimensional sound system, and other future projects will require speed and accuracy in documenting world state events, with built-in concurrency control to manage user interface across a distributed network.

This work identifies, develops and explores the design of a data model to enhance the existing NPSNET data management system. It compares traditional database technology and proposes a viable alternative to meet the increasing data management needs of the NPSNET simulator, building upon this selection to design a model of the proposed database. This work also uncovers areas for future research and development.

C. BREAKDOWN OF WORK

Chapter II covers various types of NPSNET vehicle interaction. These include examples of terrain traversal, collision with fixed and moving objects, and changes rendered by ordnance impact.

Chapter III provides a detailed description of traditional and available data models, their primary areas of application, and a discussion of their utility in the NPSNET environment. Italicized terms are in the Glossary.

Chapter IV presents a description of the proposed database mechanism for use with NPSNET, with a discussion of its selection and design. It references sample data lattices, found in the Appendix. This chapter also discusses implementation issues affecting the proposed data model within NPSNET.

Chapter V concludes this work. It reviews the proposed NPSNET Vehicle Database and recommends areas for future consideration.

II. NPSNET VEHICLE INTERACTION EXAMPLES

The NPSNET visual combat simulator models land, air and sea vehicle operation. The virtual world in which the vehicles operate includes terrain features, cultural features representing fixed objects, or obstacles, and weaponry, or ordnance, features. All simulated objects within NPSNET fall under the umbrella of a vehicle, terrain, obstacle or ordnance class, respectively.

NPSNET achieves virtual world battlefield exploration and experimentation using interactions between objects of the vehicle, terrain, obstacle and ordnance classes. A discussion of these object classes, with examples of their interaction in a real-time interface with the user, follows.

A. INTERACTION WITH TERRAIN

The first step in virtual world development is to obtain data that represents the world the system will model. A three-dimensional visual simulation commonly starts with a large two-dimensional grid of elevation data and converts it into a three-dimensional terrain carpet [Zyd92]. NPSNET divides the terrain data of the original SIMNET database into gridsquares designed to accurately represent actual terrain features such as soil type, water masses, vegetation and elevation. Additionally, it effects environmental conditions including coastal fog or urban haze.

Vehicle interaction with the environment will further evolve terrain representation into a more dynamic facsimile. The concept of dynamic terrain recognizes that simulated objects can affect the environment and that these effects must be recognizable throughout the simulation. If, for example, a vehicle knocks down a tree, dynamic terrain will represent the tree throughout the network as knocked down, and from that point forward, users joining the system must view the virtual world with that tree knocked down, with the change recorded so that the episode can resume even if a hiatus occurs [Zyda93].

Ordnance can also interact with the terrain. An artillery round fired from a vehicle and creating a crater upon hitting the ground is another example in which simulated interaction imposes lasting effects upon the environment.

The database must save dynamic terrain modifications and relay them across the NPSNET system so that all users view the same state of the world model. The credibility of the system, otherwise known as immersion, is contingent upon successful real-time storage and retrieval of this data.

B. INTERACTION WITH OBSTACLES AND VEHICLES

In the first NPSNET incarnation, vehicles could pass through fixed and moving objects, decreasing the immersion of the user in the virtual world. NPSNET now integrates collision detection into its overall system, enhancing

realism and increasing system data needs as the computer constantly searches the world model to determine if a vehicle is sharing its space with another object. NPSNET further maintains its usefulness with real-time collision response that includes an assessment and report of damages that colliding objects suffer. An accurate database and efficient management system will facilitate processing of simulated vehicle interaction.

1. Interaction with Obstacles

NPSNET incorporates the cultural features of roads, buildings, signs and other fixed objects to more fully immerse the user into its simulated world. It documents instances of vehicle contact with such obstacles and records system responses for network distribution so that all users interact with the same state of the world model.

As a vehicle proceeds through NPSNET, an algorithm updates its position and checks for an object collision. The algorithm maintains real-time simulation by limiting the scope of the collision detection to those obstacles attached within the current gridsquare radius of vehicle movement [Osbo91].

An example of vehicle contact with a cultural feature is the positioning of a ship alongside a pier. Collision detection identifies the immediate proximity of the vessel to the structure and collision response relays the success of the simulated docking maneuver to the user.

A vehicle collision with a fixed obstacle such as a watertower affects the simulated environment as in the dynamic terrain example given previously. A parked vehicle also affects the environment when it ceases vehicle movement through a terrain gridsquare and becomes an obstacle attached to the terrain by parking within that gridsquare.

2. Interaction with Vehicles

The potential exists for a user's vehicle to collide with any of the other NPSNET land, air or sea vehicles. A collision check for moving objects first limits the scope of the collision detection range to identify only probable collision participants, then determines if a collision has occurred before determining the actual point of collision [Osbo91]. Next, NPSNET runs a response function to display the extent of damage to the vehicles involved.

A common example of a vehicle collision is a crash between two land vehicles, such as a jeep running into a tank. Other vehicle interaction examples include a fighter jet landing on an aircraft carrier or a cargo truck driving onto a railcar platform. In these instances, NPSNET will reflect both the individual characteristics that each vehicle retains and the resulting damage or composite state of the vehicles involved.

C. INTERACTION WITH ORDNANCE

NPSNET vehicles also interact with their own weaponry and the armament of other vehicles. NPSNET will note the

impact of ordnance upon a vehicle, such as missile contact with a personnel carrier, detecting it similarly to a collision between vehicles. Collision response alters the world model state to reflect casualties back to networked workstations.

NPSNET attempts to regulate and monitor the use or release of vehicle ordnance, updating statistical characteristics accordingly. Weapons realistically deploy ammunition. A submarine, for example, cannot launch a missile that it does not have, nor can a machine gun continue to fire after its rounds are spent. Ordnance behavior incorporates independent propulsion and ballistic motion issues.

Dynamic terrain comes into play with ordnance interaction. As terrain state changes, NPSNET will capture and record any alterations, noting obstacle modifications if an interaction with ordnance changes cultural features to impose a lasting effect upon the environment. A crater left by an artillery round highlights a good example of an altered terrain state.

NPSNET stresses truthfulness in its simulation of object interaction. To teach a user incorrectly in a vehicle combat simulator puts that individual in danger and could perhaps lead to a lethal situation when the user encounters reality, losing the usefulness of the simulation [Zyda93]. Accurate vehicle interaction relies heavily on an effective data

model with efficient storage and retrieval mechanisms. A discussion of certain traditional and available data models, their evolution, and their relevance in the NPSNET environment appears in the next chapter.

III. DATABASE EVOLUTION

Databases have evolved over the past two decades from rudimentary, ad hoc systems into central components of organizational information systems [Higa92]. In the relatively short time since commercial data management products first appeared, this area of computer research and development has become a primary field of fundamental and conceptual importance [Date81]. This chapter introduces *database management* and documents its progression through the three best known data paradigms, the *hierarchical*, *network* and *relational data models*. It concludes with a discussion of emerging trends in data modeling and data processing that are propelling the field of data management toward an *object-oriented* front, presenting a detailed description of the new and powerful *object data model*. Italicized terms found in this chapter are in the Glossary.

A. HISTORICAL PERSPECTIVE

A *database management system* entails a database and a set of programs that allow users to access and modify system data files [Date81]. A *data model* specifies a given database, and then refers to it in terms of the abstract and concrete features of the *types*, *aggregates* and *relationships* of data within that database. A *data language* provides access to the database as it specifies data processing, integrity and security requirements [Hsia91]. Together, a

data model, data language and database management system characterize the concept of database management.

In order to better understand our current needs and future direction in data management, we should first understand the history of database management, which traces the history of data processing itself [Stev92]. With the conception of information processing machines, programmers have faced the challenge to manage data and to store and organize it into formats allowing for rapid and flexible processing. While these basic information systems requirements remain, system architectures continue to change significantly as more powerful development tools produce increasingly complex applications [Andl92].

Early computing systems were proprietary, with database management ad hoc, customized for specific applications. As computer usage increased, there was a parallel rise in user demand for support of a wider variety of applications, and the mid 1960s saw the first generation of database management systems [Andl92]. The introduction of standard, general-purpose systems freed developers from creating new database management software for each new application, but the use of such systems mandated the definition of certain data models that system designers would use [Stev92].

B. TRADITIONAL DATA MODELS

Data management for the mainframes of the 1960s conserved memory space and processing load, organizing data

along clearly defined access paths, evolving into the hierarchical and network data models [Andl92]. The minicomputers of the late 1970s and the early 1980s brought the need for interactive, flexible data management, and the relational data model promised to meet these new requirements. What follows is a brief description of each of these three traditional data models.

1. Hierarchical Data Model

The hierarchical data model was one of the first formal data management approaches, supporting hierarchical organizations that exist in the real world by representing data in an inverted tree structure. A hierarchical data model accesses data from the top to the bottom of its structure in a series of nodes, similar to branches in a tree, with embedded physical pointers in the data *records* to support interfile relationships.

The hierarchical format defines the concepts of a *parent* record, a *child* record, a record type, and parent-child relationships, observing properties as follows [Elma89]: (1) the hierarchy root does not participate as a child record type in any parent-child relationship; (2) every record type except the root does participate as a child record type, with only one distinct parent for each child; (3) any parent record type can participate as parent in any number (zero or more) of parent-child relationships; (4) a record type that does not participate as a parent

record type in any parent-child relationship is a leaf; and (5) if a record type participates as parent in more than one parent-child relationship, then its child record types are ordered, with the order displayed, by convention, from left to right in a hierarchical diagram.

Figure 3.1 illustrates the hierarchical relationships of an organizational database that has files of companies, divisions within each company, and departments within each division [Stev92]:

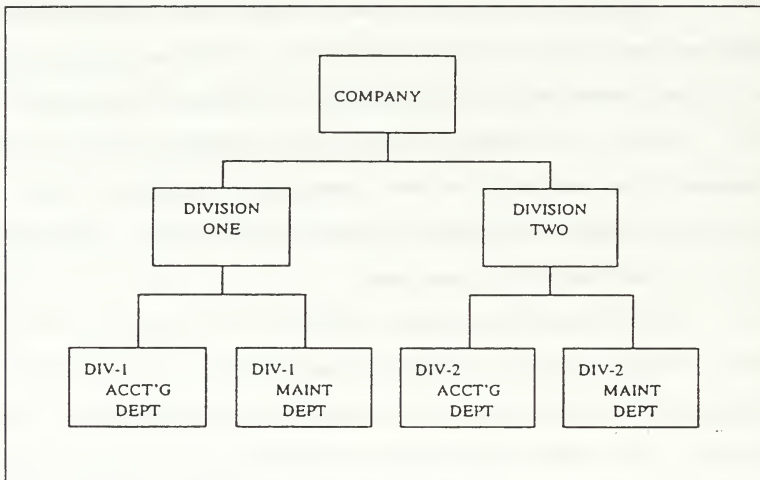


Figure 3.1 A Hierarchical Database

Some disadvantages result from the rigidity of the hierarchical structure. Modification of the database structure is a very complex task because a previously undefined, new access path may be complicated or even impossible to achieve [Andl92]. Additionally, the

hierarchical data model has no ability to represent records with multiple parent relationships, unlike the network data model.

2. Network Data Model

The network data model evolved from the need to easily depict non-hierarchical relationships. If the organization of Figure 3.1 were to allow one department to support multiple divisions, the network data model would be able to directly portray the ensuing parent-child relationships. Figure 3.2 [Stev92] shows a network representation of a department record with multiple parents:

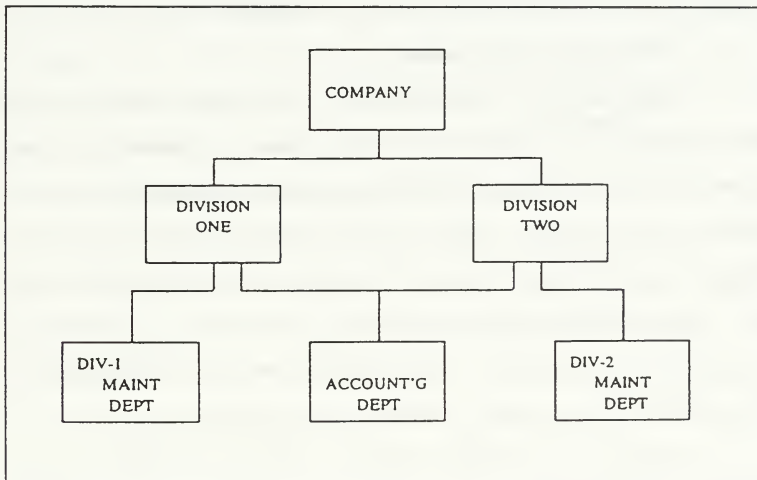


Figure 3.2 A Network Database

While a network continues to organize data in an inverted tree, it is a more general structure than a hierarchy. A given record occurrence in a network may have

any number of immediate superiors, modeling a many-to-many correspondence more directly than the hierarchical approach [Date81]. Predefined *pointers* link records, increasing flexibility over the hierarchical data model.

The disadvantage of the network data model is its reduction in high-access performance. The complexity of the network structure makes queries more complex and modification more complicated. While the network data model of data management is ideal for information systems departments to use for large-scale batch processing, it does not meet the need for interactive or ad hoc data management, as does the relational data model [Andl92].

3. Relational Data Model

The relational data model is the best known of the three traditional record-based data models [Hsia92]. The entire data file format of the relational database is visible to the user. Data in the relational data model is stored in tables consisting of columns and rows, with the rows representing data records and the columns representing the fields in a record. The database uses a *primary key* data *element* to uniquely identify each record.

Figure 3.3 [Stev92] shows a typical relational database in which the primary key of one record is a *secondary key* for another record. This allows an application to retrieve records of one type based on the specified primary key of another type.

In this case, the division identification number is the primary key of the division record. Because each department record contains the identification of the division to which it belongs, the division identification number is the secondary key of the department record.

Since many departments can belong to one division, the application can use this secondary key to retrieve a list of which departments belong to a particular division. The arrow icon, with its single and double arrowheads, represents a one-to-many relationship linking the two records.

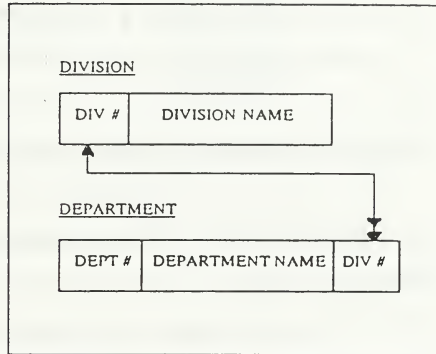


Figure 3.3 A Relational Database

To support a many-to-many relationship, the relational data model uses a connector file to link record definitions. A concatenation of primary keys from the linked records forms the primary key to the connector file, while either data element by itself forms a secondary key [Stev92]. The connector file may also contain data items that are unique to the connection itself.

In Figure 3.4, the division and department identification numbers together form the primary key of the connector file. Individually, each is a secondary key of

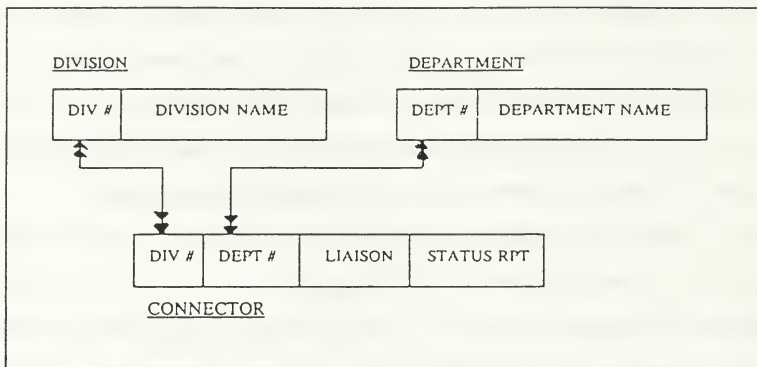


Figure 3.4 A Many-to-Many Relationship

the connector file, as well as the primary key of their respective file.

The relational data model uses actual data values in its records, rather than hidden pointers, to represent file relationships and locate data elements. This associative access is less vulnerable than navigating by pointer, for it eliminates the risk of broken pointer chains, increases data integrity, and facilitates recovery from system error.

A general-purpose relational database management system is relatively easy to design and develop, and can represent any interfile relationship found in other record-based data systems. The relational approach examines database file relationships to reorganize data elements in an effort to eliminate redundancy, internal file pointers, and repeating groups of data elements in the records. These points combine with its inherent strength to make the

relational data model the standard method for representing data in a database [Stev92].

The relational data model achieves its superior flexibility and maintainability at the cost of a higher level of processing to establish connections and access data. Its systems requirements for processor and memory are higher to achieve the same level of overall performance found in tree structures [Andl92].

The demand for more powerful and flexible distributed relational database management systems, when coupled with the desire to support variable-length data items, repeating groups, and *abstract data types*, leads us beyond the traditional data models to investigate a fourth kind of data model. This new paradigm, the object data model, is a merging of object-oriented programming and traditional database technology [Booc91].

C. OBJECT DATA MODEL

Design of advanced programming languages and environments provided the primary introduction of the object-oriented paradigm, which directly represents real-world objects by database objects [Bert91]. The pervasive growth of object-oriented programming technology makes it the chosen technique for software development in the 1990s.

Object-oriented programming derives its strength from four fundamental characteristics [Stev92]: *abstraction*, *encapsulation*, *inheritance* and *polymorphism*. Abstraction is

the ability to design new abstract data types for object representation. Encapsulation binds the behavior of an object to its data values in one logical unit. Inheritance allows new data types to derive, or inherit, behavior from old ones, and polymorphism customizes the behavior of a derived data type.

The merits of using an object-oriented approach to database management stem from its perceived power over traditional approaches and its inclusion of the robust constructs, functions and features that allow programmers to capture the organic elements of their application [Hsia91]. While conventional data models "scatter" information about an object over several records or files [Elma89], object-oriented programming promises a more natural relationship between information and its processing. Because object-oriented design can represent data in ways that traditional data models cannot, it needs a database model of its own. The object data model is the first attempt to marry a programming model with a database model [Stev92].

The object approach to data management efficiently provides a single, object-oriented language to define both the data and the user interface [Andl92]. The object data model describes the structure of its system *objects*, including their identity, their relationships to other objects, their attributes, and their operations [Rumb91]. Each object-oriented program is a cooperative collection of

these system objects, and each object represents an instance of some class. Object-oriented classes are members of a class hierarchy, whose inheritance relationships unite them [Booc91]. Classes define the attribute values that each object instance carries, and the operations which each object performs or undergoes [Rumb91].

Graphical representations of the object model, like the one in Figure 3.5, diagram object classes, arranging them into hierarchies that share common structure and behavior with which other classes can associate [Rumb91]. In a multilevel class hierarchy, the root of each class is an object and the instances of each class are the classes at

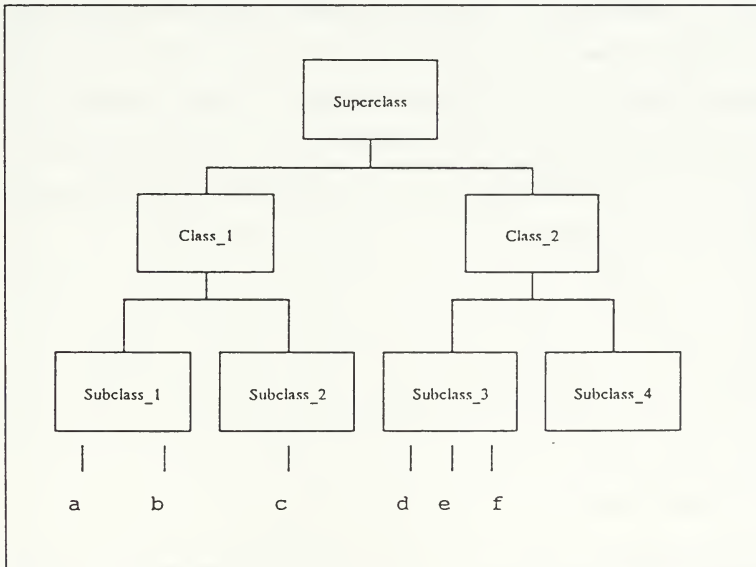


Figure 3.5 A Class Hierarchy

the next lower level. The lowest level of the generic class hierarchy leads to the objects that are instances of the lowest-level class that comprises the objects [And192]. Each lower level, or *subclass*, is derived from a *base class*, or *superclass*.

Figure 3.6 replaces generic class and object names to describe a "Land_Vehicle" object data model, where object classes such as "M1" and "M113" are at the lowest level of the "Tracked" class, which in turn is a subclass of the "Land_Vehicle" superclass. Each object instance of the tracked land vehicle "M1" is the lowest-level object in this hierarchy.

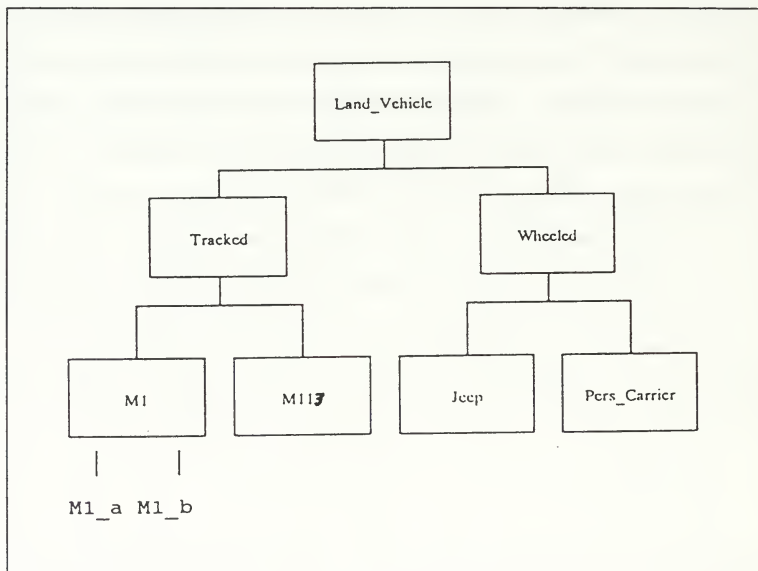


Figure 3.6 A Land_Vehicle Class Hierarchy

A comparison of available database technology to the needs of a virtual world system like NPSNET highlights some traditional data model shortfalls. Hierarchical and network databases are weak choices for NPSNET data management, as they rely on hidden pointers, are often complex and sometimes impossible to modify, and do not meet the need for interactive data management. Relational data models overcome these problems but their rules prohibit many of the data representations that an object paradigm can support.

A real-time vehicle combat simulator like NPSNET requires a data management system that can accommodate the vast array of graphic object imagery, movement and sound that combine to fully immerse the user in its world. The object data model is a viable option to represent NPSNET. The following chapter expands on the selection and design of the proposed NPSNET vehicle database, and discusses some implementation issues affecting the proposal.

IV. PROPOSED NPSNET VEHICLE DATABASE

NPSNET simulates a full complement of land, air and sea vehicles, their ordnance, their movement, and the mediums through which they move. An NPSNET storage and retrieval facility should support the varied demands involved in real-time vehicle combat simulation, including intelligent autonomous agents, a three dimensional sound system, dynamic terrain and ballistic motion issues, multiple workstations and built-in concurrency control. The progression of NPSNET toward object-oriented modeling and real-time scene management over a distributed network highlights its need for an updated data management system. NPSNET_V, a proposed NPSNET Vehicle Database, emulates the persistent features of a relational database while capitalizing on the object-oriented characteristics of abstraction, encapsulation, inheritance and polymorphism. This chapter discusses the selection and design of the NPSNET_V object data model and then explores its implementation.

A. NPSNET_V: DATA MODEL OVERVIEW

Comparison of the strengths and weaknesses of available data models indicates that NPSNET_V, a proposed NPSNET Vehicle Database, would benefit from a combinational design approach. Going beyond traditional data models, NPSNET_V experiments with object-oriented database design to meet the increasing data management requirements of NPSNET. It

adapts the relational data model to its NPSNET objects to combine the strengths of a relational model with the inherent capabilities of object-oriented design, defining related persistent classes and their behavior within the NPSNET vehicle combat simulator.

As an object data model, NPSNET_V can represent variable length data members, using abstraction to accommodate NPSNET simulations such as imagery, multimedia, geographic data and weather. Encapsulation allows NPSNET_V to bind data representation and behavior to more naturally represent the NPSNET modeled world. Through inheritance, NPSNET_V builds a hierarchy of derived classes, and it uses polymorphism to further customize the behavior of its derived data types.

Drawing strength from the relational model, NPSNET_V achieves persistence by defining a base class that participates in its own persistence, from which it can derive its other classes. NPSNET_V relates object locations and relationships by associating key data values with each object instance, and it maintains the integrity of those relationships to keep the database in a stable condition with respect to the real-time scene management needs of NPSNET over its distributed network [Stev92].

B. NPSNET_V: DATA MODEL DESIGN

Object database technology is still so new that no formal design methodology exists. While the basic concepts of objects, classes and inheritance seem widely understood,

common use of inheritance and composition to achieve a useful and robust class hierarchy is not yet well-defined [dePa91]. Instead, various guidelines for object data modeling present themselves to designers who favor an object-oriented approach over established, but less versatile, data models.

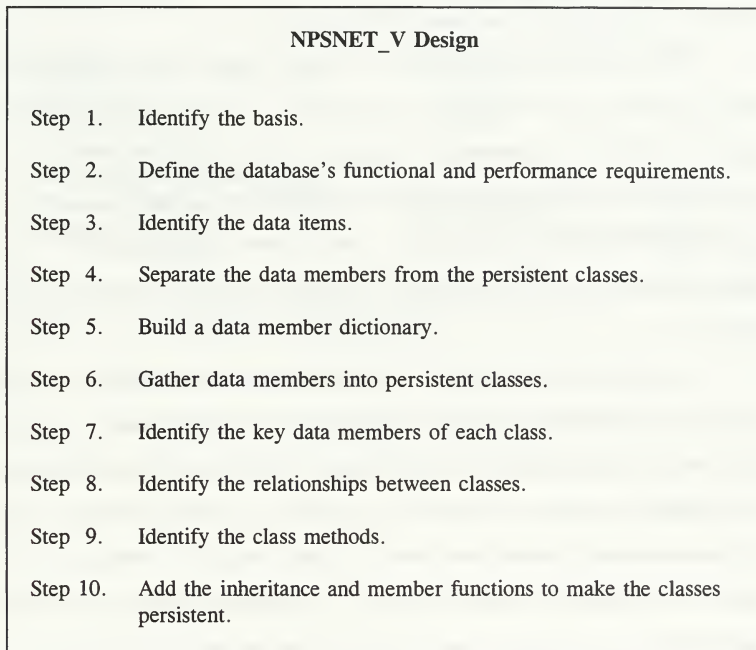


Figure 4.1 Ten Basic Object Database Design Steps

NPSNET_V traces its development through guidelines of ten basic object database design steps, shown in Figure 4.1 [Stev92]. An unlisted but important final step is refinement, particularly since overall NPSNET development is

ongoing. Highlights of these design steps, with respect to NPSNET_V, follow.

1. Identify the Basis

The basis for NPSNET_V rests in the mission and purpose of the NPSNET vehicle database. It reviews resources available for NPSNET_V development and proposes possible approaches to problem solution.

The mission of NPSNET_V is to update the existing NPSNET storage and retrieval facility. Its purpose is to support a real-time vehicle combat simulation that encompasses dynamic terrain and ballistic motion issues, intelligent autonomous agents, and three-dimensional representation, with expansion capability for future projects.

Resources available for NPSNET_V development include the present NPSNET database system and the parameter goals under which the simulator operates, as well as the objects that NPSNET models, primarily vehicles, their ordnance, and the terrain and obstacles which affect their movement. NPSNET progression toward object-oriented modeling and real-time scene management over a multiple workstation network makes object-oriented data management a likely approach to NPSNET vehicle data model design.

The NPSNET_V basis is an evolving description, changing as system updates occur. It is a necessary first step in data model design, laying the foundation for the

NPSNET_V requirements analysis. Figure 4.2 summarizes the NPSNET_V basis.

NPSNET_V Basis	
<u>Mission</u> Update NPSNET storage and retrieval facility.	<u>Resources</u> - NPSNET database system - Parameter goals of simulator operation - Objects that NPSNET models: -- vehicles -- ordnance -- terrain -- obstacles
<u>Purpose</u> Support real-time vehicle combat simulation: - Dynamic terrain - Ballistic motion - Intelligent autonomous agents - Three-dimensional representation Expansion capability.	<u>Possible solution</u> Object-oriented data management

Figure 4.2 Object Database Design Step 1:
Identify the Basis

2. Define the Requirements

A requirements definition should state system needs, indicating what is to be done without specifying how it is to be done [Rumb91]. This step of the NPSNET_V database design process reviews both functional requirements and performance requirements.

NPSNET_V functional requirements detail the kind of data the vehicle database contains as well as the expected output of the system. They identify pieces of information that the database must comprise. NPSNET_V performance requirements include criteria about how the system will run, backup, recover and restart, as well as details about system

maintenance and database administration [Stev92]. Figure 4.3 summarizes these requirements.

NPSNET_V Requirements		
Vehicles	Operations	Terrain
- air	- speed	- vegetation
- land	- range	- barren cover
- sea	- ammunition	- urban details
Ordnance	- cargo	- environment
- ballistic	- assignment	-- fog
- controlled	Vehicle Interactions	-- rain
- static	- collisions	-- snow
Characteristics	- explosions	Obstacles
- names	- movement	- single point
- numbers	- operations	- linear
- costs		- areal
- dates		Dynamic Terrain

Figure 4.3 Object Database Design Step 2:
Define the Requirements

NPSNET catalogues multiple air, land and sea vehicles, as well as ballistic, controlled and static ordnance. Its database must document their individual characteristics, such as names, numbers, costs and dates, as well as operational features like speed and range capabilities, and ammunition and cargo assignment.

The system tracks vehicle interactions, including collisions, explosions, movement and other operations. NPSNET also catalogues terrain and environmental conditions through which the vehicles and ordnance move, and obstacles that impact their movement. These include vegetation,

barren cover, urban details, fog, rain, snow, and single point, linear and areal fixed objects.

Ideally, the level of system detail will incorporate real-time scene management concerns, particularly those of concurrency control, point of reference, current object status, dynamic terrain features and vehicle state-of-readiness at a given point in the combat simulation. The functional and performance requirements will help identify data items that NPSNET_V must support.

3. Identify the Data Items

A simple and effective way to identify NPSNET_V data items is to extract probable data references, particularly nouns, from the NPSNET_V basis and requirements of the first two design steps. Each significant noun, or data item, may result in NPSNET_V class or data member representation in the next part of the object database design process.

Other data associated with these references will expand the list and assist in identifying additional data items. Verbs associated with the list are important for later use in identifying class methods. Organize the NPSNET_V data items in a fashion that allows for sorting and reordering. This will facilitate additional refinement, as the database design progresses.

Figure 4.4 presents an initial list of nouns from the basis and requirements steps. These data items may result in NPSNET_V class or data member representation.

NPSNET_V Data Items

Basis nouns:

dynamic terrain	vehicles
ballistic motion	ordnance
three-dimensional	terrain
representation	obstacles

Requirements nouns:

air vehicles	operations	terrain
land vehicles	speed	vegetation
sea vehicles	range	barren cover
ballistic ordnance	ammunition	urban details
controlled ordnance	cargo	environment
static ordnance	assignment	fog
characteristics	vehicle interactions	rain
names	collisions	snow
numbers	explosions	single point obstacles
costs	movement	linear obstacles
dates	dynamic terrain	areal obstacles

Figure 4.4 Object Database Design Step 3:
Identify the Data Items

4. Separate the Data Members from the Classes

Data aggregates representing NPSNET_V persistent classes will come from the list of data items identified in the step above. Data members within these classes will derive from the other data items on the same list. The refined data item list of Figure 4.5 helps to highlight which items are data members and which are not. It is a reasonable place from which to start in the subjective separation of data members from persistent classes.

NPSNET_V Data Items		
ballistic motion	obstacles	terrain (-continued)
movement	areal	urban
3-D representation	city	asphalt
characteristics	crater	city
ammunition	linear	railway
cargo	barrier	roadway
costs	dock	waterway
unit	transport	vegetation
crew	point	brush
capacity	antenna	crop
complement	building	forest
dates	buoy	water
commission	operations	flowing
decommission	assignment	river
names	consumption	waterway
crew member	rate	standing
hull	source	lake
model	movement	ocean
numbers	platform	pond
buno	range	puddle
hull	speed	swamp
serial	storage	3-D representation
social security	capacity	graphic
collisions	location	sound
vehicle with obstacle	transfer	vehicles
vehicle with ordnance	destination	air
vehicle with terrain	source	aircraft
vehicle with vehicle	ordnance	fixed wing
dynamic terrain	ballistic	rotary
collisions	gun	hydrofoil
explosions	howitzer	land
terrain	mortar	amphibian
explosions	controlled	railed
ordnance on obstacle	missile	tracked
ordnance on ordnance	torpedo	wheeled
ordnance on terrain	static	sea
ordnance on vehicle	mine	submarine
movement	terrain	surface
acceleration	barren	amphibian
attitude	dirt	hydrofoil
distance	mud	ship
direction	rock	vehicle interactions
elevation	sand	collisions
gridpoint	environment	explosions
gridsquare	fog	movement
velocity	haze	operations
	rain	
	snow	

Figure 4.5 Refined List of NPSNET_V Data Items

Stevens cautions that the clear separation in traditional database design between aggregates and data elements does not exist in an object-oriented design. Here, some of the apparent data elements will in turn become abstract data types, or classes [Stev92]. This step must incorporate author judgment and discernment to differentiate between the two. One method of discernment is to separate the line entries of the data item list, rearranging and regrouping them to aid in data member recognition. Some items will stand out as singular data members, while others seem to naturally suggest aggregates of data members.

NPSNET_V Data Members		
crew capacity	hull number	gridpoint
crew complement	serial number	gridsquare
unit cost	social security	velocity
commission date	number	consumption rate
decommission date	acceleration	range
crew member name	attitude	speed
hull name	distance	storage capacity
model name	direction	storage location
buno number	elevation	
Additionally, each individual <i>instance</i> of:		
collisions	obstacles	terrain
explosions	ordnance	3-D representation
		vehicles

Figure 4.6 Object Database Design Step 4:
Separate the Data Members from the Classes

Figure 4.6 is an initial list of NPSNET_V data members, taken from the data item nouns of the previous

step. Separation of these data members from the persistent classes is necessary in preparation for the next two NPSNET_V design steps.

5. Build Data Member Dictionary

This design step ushers in the first construction phase of the NPSNET_V database solution. It builds a data member dictionary from the data members in NPSNET_V that will be members of persistent classes. The ability to organize, sort and rearrange this data remains important. Itemize each data member separately to aid in later identification of their redundancies and interclass relationships.

Building a data member dictionary requires comprehensive knowledge about its data members, including, at a minimum, the data type of each data member. For some items in Figure 4.6, data type determination is easy. Some of these data members will be instances of abstract data types, possibly taken from class libraries. For example, costs may be instances of a currency class, dates will be instances of a date class, and names will be instances of a string class [Stev92].

Dates and social security numbers are data members with known ranges and formats. Not all numbers are simple integer types, however. Some may be abstract integer types, with defined ranges, while others, like serial numbers, may contain letters or punctuation, as well as digits. The data

members that represent certain values may be quantities or amounts that must have defined limits, and those that refer to location may require a set of enumerated values.

Data typing is often application dependent. The format of a collision, explosion, obstacle, ordnance, terrain, three-dimensional, or vehicle data item, for example, is not obvious from the data member list alone. Because NPSNET is an existing system, its available source code and documentation can contribute to the construction of the data member dictionary. Stevens suggests using source code, in lieu of inadequate documentation, to first examine how existing software uses data members, and then to "reverse-engineer" their characteristics [Stev92].

Once each data member has a clearly defined format and behavior, construction can begin of classes that will implement these members. A clear and comprehensive definition of the physical properties of all data members within the database is an imminently important stage of NPSNET_V design, and should be a matter for future consideration. An in depth definition of these data members goes beyond the scope of this endeavor. The following steps use sample definitions for a representative selection of data members.

6. Gather Data Members into Classes

After separating the data members from the NPSNET_V data item list, aggregates remain. Most of these aggregates

NPSNET_V Classes

ballistic motion	operations	roadway
characteristics	assignment	waterway
ammunition	consumption	vegetation
cargo	consumption source	brush
costs	platform	crop
crew	storage	forest
dates	transfer	water
names	transfer destination	flowing
numbers	transfer source	river
dynamic terrain	ordnance	standing
collisions	ballistic	lake
vehicle with obstacle	gun	ocean
vehicle with ordnance	howitzer	pond
vehicle with terrain	mortar	puddle
vehicle with vehicle	controlled	swamp
explosions	missile	3-D representation
ordnance on obstacle	torpedo	3-D graphic
ordnance on ordnance	static	3-D sound
ordnance on terrain	mine	vehicles
ordnance on vehicle	terrain	air
movement	barren	aircraft
obstacles	dirt	fixed wing
areal	mud	rotary
city	rock	hydrofoil
crater	sand	land
linear	environment	amphibian
barrier	fog	railed
dock	haze	tracked
transport	rain	wheeled
point	snow	sea
antenna	urban	submarine
building	asphalt	surface
buoy	railway	ship
		vehicle interactions

Figure 4.7 Object Database Design Step 6:
Gather Data Members into Classes

will become the persistent classes of NPSNET_V. Balance the remaining aggregates, listed in Figure 4.7, against the

NPSNET requirements to ensure that those left represent necessary persistent classes. This step is not absolute, as refinement will play a large role in the final determination of what are, and are not, persistent classes.

The intent of this step is to gather data members into the remaining NPSNET_V persistent classes by defining the data representation of each class. Identify the data members of each class. Gather together all data items related to the class, and build a figurative stack of the relevant data members. While this task sounds simple, it is often confusing and may require a great deal of refinement. Again, organize the information in a manner that allows for sorting and rearranging.

Next, identify the data types of each data member within the class, using the definitions of the data dictionary from the previous step. Once these definitions are in place and the necessary abstract data types exist, the design of each persistent class falls into place.

The four primary NPSNET_V object classes are the ordnance, vehicle, obstacle and terrain classes. Each is a superclass, representing an aggregate of several other, derived classes. Identification of an object within such a class requires representation of its class hierarchy, and subsequent data representation of each subclass. Extensive class hierarchies of the ordnance, vehicle, obstacle and terrain superclasses appear in the Appendix.

Consider data representation of a Mk 46 torpedo. The NPSNET_V Ordnance Class Hierarchy, found in the Appendix, lists this ordnance object as a member of the **MK_46** class of torpedoes. Figure 4.8 shows an example of a data representation of the **MK_46** class design, utilizing string, real number, character, simple integer, date and currency data member definitions.

```
class MK_46 {                                //Mk 46 torpedo
    String serialno;                          //serial identification number
    String name;                             //"Mk 46 torpedo"
    String model;                             //"Mk 46"
    Real length;                             // 8.5 ft
    Real diameter;                           //12.75 ft
    Real weight;                             //508 lb
    Real max_speed;                          //45 knots
    Real max_range;                          //12,400 yd at optimum depth
    Real acquisition_range;                  //more than 1,000 yd
    char piston_engine;                      //piston engine (solid propel), yes/no
    char cam_engine;                         //cam engine (liquid propel), yes/no
    int PBXN_103;                            //98 lb PBXN-103 high explosive
    Date date_prod;                          //service entry date
    Currency cost_unit;                      //unit cost
    String contractor;                       //Honeywell
    String buno;                             //buno number of deployment helo
    String hullno;                           //hull number of deployment ship
};
```

Figure 4.8 The **MK_46** Class

Class design is an ongoing process. An existing class design should neither restrict a following design nor remain exempt from future review and revision. With this in mind, consider data representation of an SH-60B Seahawk helicopter. The **SH_60B** class is listed in the NPSNET_V Vehicle Class Hierarchy, also found in the Appendix. It derives from the "H-60 single rotary aircraft" path of the hierarchy. Figure 4.9 shows a sample **SH_60B** class design.

```

class SH_60B {                                //SH-60B Seahawk helicopter
    String buno;                               //buno identification number
    String name;                               //"Seahawk"
    String model;                              //"SH_60B"
    Real fuse_length;                          //50 ft
    Real over_length;                          //64.6 ft
    Real rotor_dim;                            //53.5 ft
    Real height;                               //17 ft
    Real max_gross_weight;                     //21,884 lb
    int T700_GE_401C;                          //twin T700-GE-401C Turboshaft engs
    int 1900_shaft_hp;                          //1,900 shaft horsepower per engine
    Real max_speed;                            //180 knots
    Real max_range;                            //About 380 nm
    Real max_fuel;                             //4,000 lb
    Real consumrate_fuel;                      //1,000 lb/hour
    char LAMPS_Mk_III                          //LAMPS Mk III Weapons System
    int Mk46_torp;                             //2-Mk 46 torpedoes
    int Penguin;                              //1 Penguin missile
    int crew_comp;                             //crew complement of 3, takes up to 5
    int off_comp;                              //officer complement of 2
    int enl_comp;                              //enlisted complement of 1
    char rotor_brake;                          //rotor brake, on/off
    char blade_fold;                           //blade fold, yes/no
    char tail_fold;                            //tail fold, yes/no
    Date date_comm;                            //service entry date
    Currency cost_unit;                        //unit cost
    String contractor;                         //Sikorsky
    String hullno;                             //hull number of deployment ship
};                                              //

```

Figure 4.9 The SH_60B Class

An *Arleigh Burke*-class AEGIS destroyer also appears in the Appendix, as a member of the DDG_51 class of surface ships. An example of its class design is in Figure 4.10.

Note that instances of both the SH_60B and MK_46 classes may be assigned to the DDG_51 class, and that both an SH_60B and a DDG_51 may have assigned instances of the MK_46 class. The requirement to deploy ordnance on a vehicle, or embark one vehicle on another, addresses design decisions that surpass the flat file representations of Figures 4.8, 4.9 and 4.10. A relational model would


```

class DDG_51{                                     //Arleigh Burke-class DDG
    String hullno;                               //hull identification number
    String name;                                 //"Arleigh Burke"
    String model;                                //"DDG"
    Real over_length;                            //509.5 ft loa
    Real beam;                                  // 66.7 ft
    Real draft;                                 // 30.5 ft (navigational)
    Real max_displacement;                       //9,9195 tons (full load)
    int gas_turbine;                             //4 gas turbines
    int 100k_shaft_hp;                           //100,000 shaft hp, 2 shafts
    Real max_speed;                              //31 + knots
    Real max_range;                              //4,400+ nm at 20 knots
    Real max_fuel;                               //maximum fuel load
    Real consumrate_fuel;                       //fuel consumption rate
    char Flight_IIA;                             //FlightIIA design, yes/no
    int SH_60B;                                  //SH-60B Seahawk, embarked
    int 64_Mk41_VLS;                             //1 64-cell Mk 41 VLS
    int 32_Mk41_VLS;                             //1 32-cell Mk 41 VLS
    int Harpoon;                                //Harpoon Anti-Ship Missile
    int SM_2;                                    //Navy's Standard Missile SM-2
    int TLAM;                                    //Tomahawk Land-Attack Missile
    int TASM;                                    //Tomahawk Anti-Ship Missile
    int 12_75;                                  //6 12.75-in torp tubes (2 trip mnts)
    int Mk46;                                    //Mk 46 torpedo
    int Mk50;                                    //Mk 50 torpedo
    int 5_54_Mk45;                               //1 5-in 54-cal Mk 45 dual purp gun
    int 20_Mk15;                                 //2 20-mm Mk 15 Phalanx CIWS
    char AEGIS;                                  //AEGIS Weapon System
    int Mk99;                                    //3 Mk 99 illuminators
    char SPY_1D;                                 //AN/SPY-1D multi-function radar
    char SPS_67V3;                               //AN/SPS-67(V)3 surface search radar
    char SPS_64;                                 //AN/SPS-64 navigation radar
    char SQS_53C;                                //AN/SQS-53C bow-mounted sonar
    char Kingfisher;                             //rev Kingfisher mine-detection system
    int crew_comp;                               //383 crew complement, with helo det
    int off_comp;                                // 32 officers complement
    int enl_comp;                                //351 enlisted complement
    Date date_comm;                              //commissioned 12 Dec 92
    Currency cost;                               //unit cost
    String contractor;                           //Bath Iron Works
};

```

Figure 4.10 The DDG_51 Class

represent this relationship with a file that records the ordnance-vehicle or vehicle-vehicle assignment, normalizing the design to avoid inefficiency. The data representation presented in Figure 4.11 is an example of an **Assignment** class design.

class Assignment {	//Assignment class
String idno;	//assigned object identification number
String platformno;	//assignment platform identification number
};	

Figure 4.11 The Assignment Class

This **Assignment** class serves to broadly reflect all ordnance and vehicle assignments within NPSNET_V. The identification number represents Mk 46 serial numbers, as well as SH-60B buno numbers. The platform number represents both buno and hull numbers.

Some relationships between NPSNET_V classes are more complicated than others. Each data representation requires the designer to iterate the design process, revisit the requirements, and make appropriate modifications. Only a few examples of NPSNET_V class design appear in this work. Full data representation of all NPSNET object classes is left as a matter for future consideration. The ones listed in this section serve to illustrate the potential of NPSNET_V through the remaining object database design steps.

7. Identify the Key Members

Each NPSNET_V class must have a primary key data member to identify objects of the class. Each class may also have one or more secondary keys, which identify alternate ways to locate an object within the database.

In the class design examples of the previous step, the serial number is the primary key for the **MK_46** class, and it uniquely identifies each instance of a **MK_46** object.

Similarly, the buno number is the primary key for the **SH_60B** class and the hull number is the primary key for the **DDG_51** class. Each object has a unique identification number.

The hull number is a secondary key for both the **MK_46** class and the **SH_60B** class. It identifies a ship deployment platform for each torpedo or helicopter. The **MK_46** class also contains a buno number to identify a helicopter deployment platform, in lieu of a hull number. Every **MK_46** object has either a hull number or a buno number, and multiple Mk 46 torpedoes can have the same hull or buno number.

The **Assignment** class in **NPSNET_V** is similar to a connector file in a relational database. Its primary key is the concatenation of the identification number and the platform number. The combination of these two data members uniquely identifies each instance of an **Assignment** object.

Every object in **NPSNET_V** has some feature that uniquely identifies it. During class design, base the primary key of each class on the identification feature that sets each object apart from other members of its class. If an **NPSNET_V** persistent class has no primary key, then redesign that class.

Secondary keys provide alternate ways to locate objects of a persistent class. They imply a relationship between classes when the primary key of one class is the secondary key of another. In the primary key of a connector

class, each concatenated key member is a secondary key of the connector class, as well as the primary key of one of the connected classes. The next design step touches on the class relationships that secondary keys support.

8. Identify Class Relationships

To identify relationships between NPSNET_V persistent classes, identify those classes that share a common data member. If that data member is the primary key of one of the classes, then those classes are related.

Stevens cautions that an implied relationship must have integrity, in order for it to work [Stev92]. This means that if an object of a first class contains the primary key of a second class, then there should be a matching object of that second class. For instance, if a particular **MK_46** class torpedo is assigned to a **DDG_51** class ship as part of its armament, then there must exist a **DDG_51** class object with a hull number that exactly matches the hull number in the secondary key of that particular **MK_46**.

Relationships between classes are important because they serve as potential paths for multiple-class retrievals. For example, consider the relationships between the **MK_46**, **DDG_51**, and **SH_60B** classes. A path that first retrieves a **DDG_51** object, then each **SH_60B** deployed on that ship, and then each **MK_46** assigned to each of those helicopters, will return the Mk 46 torpedoes that are deployed on the SH-60B helicopters assigned to that DDG.

If the design intent were to recover a list of torpedoes deployed directly on a particular DDG, and not those assigned to a helicopter, then the return would be incorrect. Review class relationships carefully, and develop retrieval paths meticulously, to ensure that data returns accurately reflect the intent of the retrievals.

9. Identify the Methods

Identifying the NPSNET_V class methods entails a review of the design step that gathered these classes. Return to the list of potential persistent classes, and seek out verbs that may define application-dependent behavior of the persistent classes. Figure 4.12 is a brief list of verbs drawn directly from the nouns in the NPSNET_V Classes list of Figure 4.7.

NPSNET_V Class Methods			
collide	operate	store	flow
explode	assign	transfer	snow
move	consume	rain	interact

Figure 4.12 Object Database Design Step 9:
Identify the Methods

Expand on this list, organizing the information to allow for sorting and rearranging. Identify data member behaviors, and define these behaviors as object-oriented methods. Figure 4.13 features an expanded list of potential class methods, grouped to focus on similar behaviors.

NPSNET_V Class Methods				
operate	interact	move	reverse	blow
assign	collide	accelerate	roll	flow
close	explode	ascend	sink	haze
consume	aim	decelerate	start	mist
open	fire	descend	stop	rain
store	load	float	turn	sleet
transfer	track	pitch	yaw	snow

Figure 4.13 Expanded list of NPSNET_V Class Methods

This portion of the design is similar to the design of any object-oriented program. Identify the NPSNET_V methods, then add them to the appropriate NPSNET_V persistent classes. Stevens confirms that each of these methods will bind to its persistent object because the program that retrieves the object uses the same class definition and class library used by the program that created the object [Stev92]. The remaining object database design step makes each NPSNET_V class persistent.

10. Make the Class Persistent

According to Stevens, the last step of object data model design, aside from revision, is integration of the persistent object class design into the persistent object database management system [Stev92]. Do this by adding attributes to the NPSNET_V key data members and persistent classes, enabling them to participate in their own persistence.

The type of object database management system that NPSNET employs will influence the nature of these attributes. Generally, Stevens suggests that these attributes will consist of inheritance, custom base class functions, and special member functions added to the persistent class that the base will call [Stev92].

Once its design is complete, the NPSNET_V data model will require a database management system to put it into effect. Selection of the system software, and implementation of such a system, are both projects for future research and development. The following section discusses issues affecting NPSNET_V implementation.

C. NPSNET_V: DATA MODEL IMPLEMENTATION

Implementing the NPSNET_V object data model will require the selection of a software system to process the database. PARODY is an example of a database management system that can define NPSNET_V, and bring it together with the NPSNET system. According to Stevens, PARODY is a non-proprietary "Persistent, Almost Relational Object Database" system that can be implemented as a C++ class library [Stev92].

PARODY is aptly named, for its data model is itself a type of parody, strongly resembling the traditional relational data model, while assuming certain properties of C++ objects. It can provide the persistent capabilities that NPSNET_V needs, but that object-oriented programming languages alone do not support.

1. Define NPSNET_V Database

A project for future consideration would be to define NPSNET_V as a PARODY database. Traditional database file definition involves building a data model with a data definition language to describe file content. PARODY could enable NPSNET_V to use C++ class definition. PARODY would encapsulate into the C++ class definition a description of the data members in each class, plus the integration of the class with the PARODY database manager.

NPSNET_V definition would first involve class designation to represent NPSNET_V persistent objects, already begun in the design steps of the previous section. It would next identify key data members for these classes. Abstract base classes already defined in the PARODY class library could facilitate NPSNET_V derivation of persistent object classes and key member classes.

Although an object-oriented programming language such as C++ cannot sustain object persistence on its own, PARODY could solve this problem for NPSNET_V. It would provide specific member functions to allow objects of persistent class types to participate in their own persistence.

Additional definition issues to consider would include relating NPSNET_V classes, limiting multiple-copy objects, and embedding persistent objects within other ones, to streamline application efficiency.

2. Bring NPSNET_V Together

A next step in NPSNET_V implementation could be to write the program that brings the NPSNET_V design together with the existing NPSNET system. This program would first build a database, based on the NPSNET_V object data model design. It would then declare and use NPSNET_V persistent objects to achieve NPSNET real-time vehicle combat simulation. This program would also have to be able to destroy NPSNET_V persistent objects. Finally, the program would have to tie NPSNET_V object input and output to NPSNET operations, guaranteeing system integrity along the way.

Implementation of the NPSNET_V design will require insightful planning and thoughtful programming in order to achieve an operational NPSNET object database management system. The effort will be validated by the increased real-time scene management capabilities of an enhanced NPSNET distributed network.

THE
JOURNAL
OF
THE
ROYAL ANTHROPOLOGICAL INSTITUTE
OF GREAT BRITAIN AND IRELAND
VOLUME 32
PART 1
1902
LONDON
PUBLISHED BY THE
Royal Society of Great Britain
21, BEDFORD SQUARE, W.C.1
1902

V. CONCLUSION

This work proposes NPSNET_V as a vehicle database model for NPSNET, a real-time vehicle and battle simulator. It considers the progression of NPSNET toward object-oriented modeling and real-time scene management over a distributed network, citing the need for a database with increased storage and retrieval capabilities. It reviews traditional and available data models, and documents the selection and design of the NPSNET_V object data model. In conclusion, this work discusses the viability of NPSNET_V as a data mechanism for use with NPSNET, highlighting recommendations for future work.

A. RESULTS

NPSNET_V is a viable object data model for use in upgrading the data management facility of the NPSNET vehicle combat simulator. It presents a probable approach to the problem of current NPSNET data storage and retrieval mechanisms which are slow, cumbersome to maintain and complex to enhance. As NPSNET proceeds in the direction of object-oriented modeling and real-time scene management over a multiple workstation network, its data management system must also progress.

NPSNET_V provides a design for an updated database facility to support the demands involved in NPSNET vehicle combat simulation. It adapts the relational data model to

represent NPSNET objects, combining its strengths with the functional capabilities of object-oriented design.

NPSNET_V can define related persistent classes and their behavior within NPSNET to handle the data management requirements associated with dynamic terrain, ballistic motion, intelligent autonomous agents, and three-dimensional representation. It can anticipate the needs of future projects which will require speed and accuracy in documenting world state events, with built-in concurrency control to manage user interface across a distributed network.

The proposed NPSNET_V design is a reasonable place from which to proceed with implementation of an updated NPSNET Vehicle Database. The following section recommends areas for future research and development.

B. RECOMMENDATIONS

This work identifies, develops and explores the design of a data model to enhance the existing NPSNET data management system. It also recommends areas for future consideration and implementation.


In particular, Chapter IV highlights the need for a clear and comprehensive definition of the physical properties of all data members within the proposed NPSNET database, as well as the need for full data representation of all NPSNET object classes.

This work also outlines the selection of database management system software, and implementation of such a system, as projects for future NPSNET research and development. Specifically, it recommends exploring NPSNET_V as a PARODY database, directly capitalizing on the design groundwork laid in Chapter IV.

Future design considerations should accommodate ongoing NPSNET simulator development. Data models continue to evolve to meet the needs of evolving programming languages, and NPSNET should capitalize on the merits of both.

APPENDIX


Obstacle Class Hierarchy

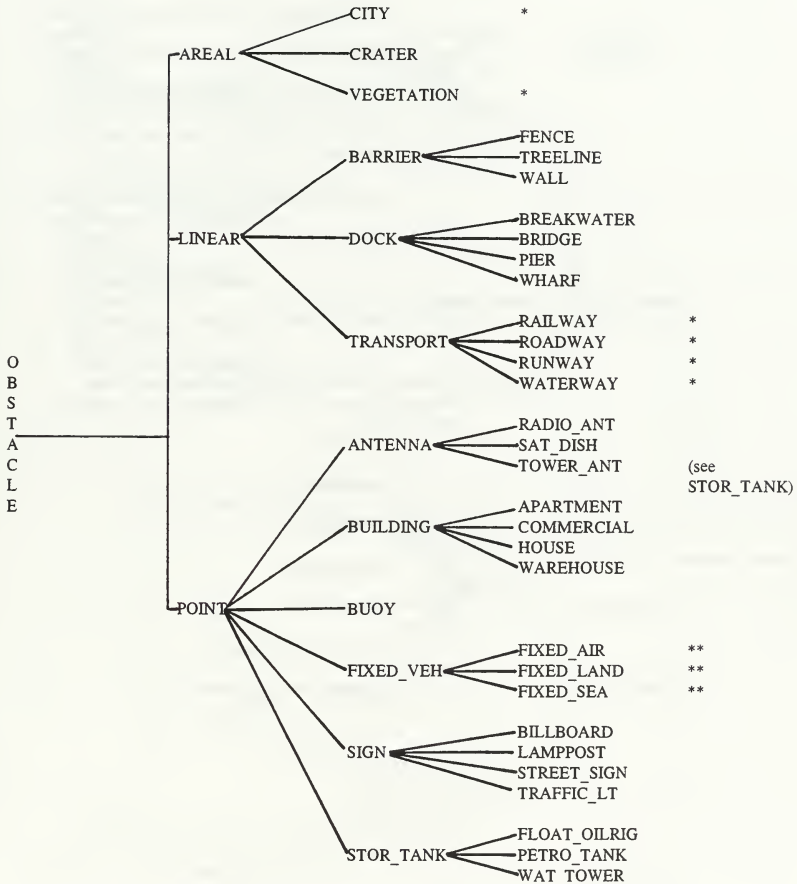


* Possible case of multiple inheritance; see TERRAIN class.

** Possible case of multiple inheritance; see VEHICLE class.

Ordinance Class Hierarchy

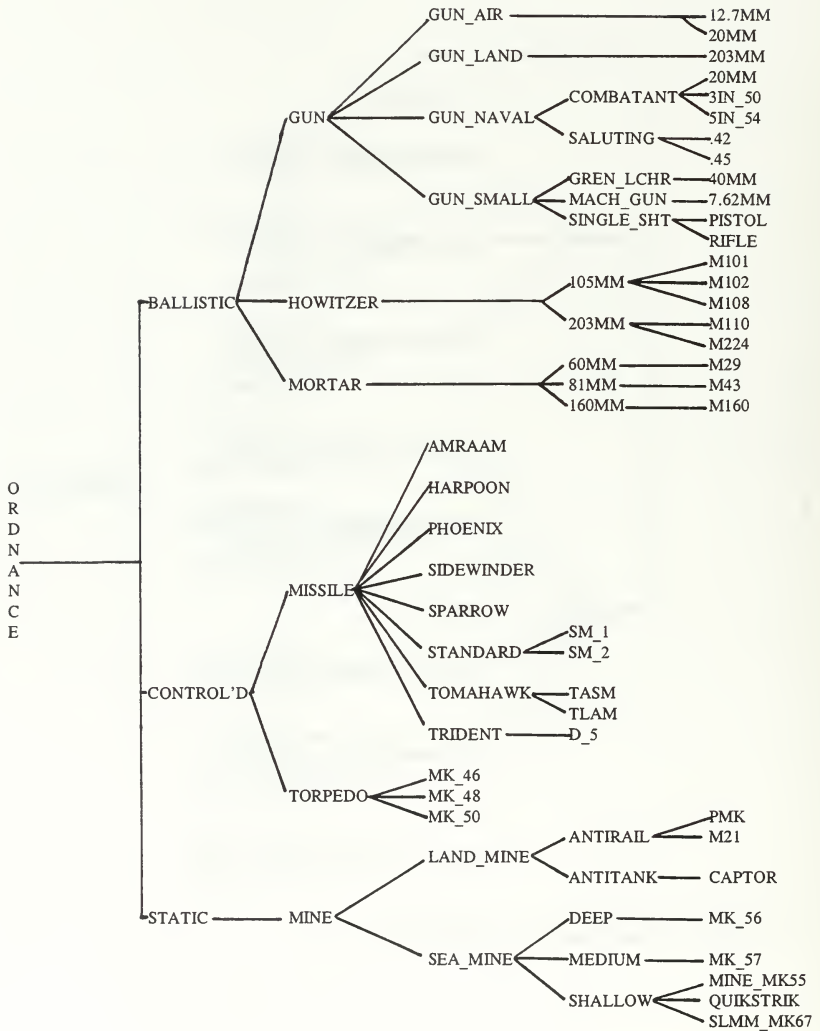


Terrain Class Hierarchy

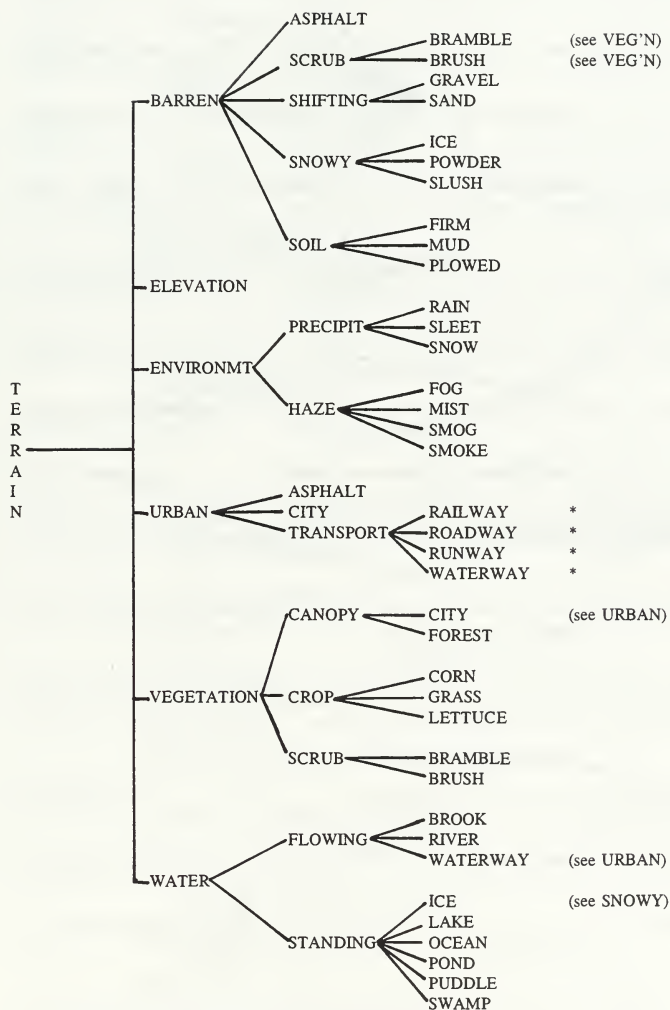

* Possible case of multiple inheritance; see OBSTACLE class.

Vehicle Class Hierarchy

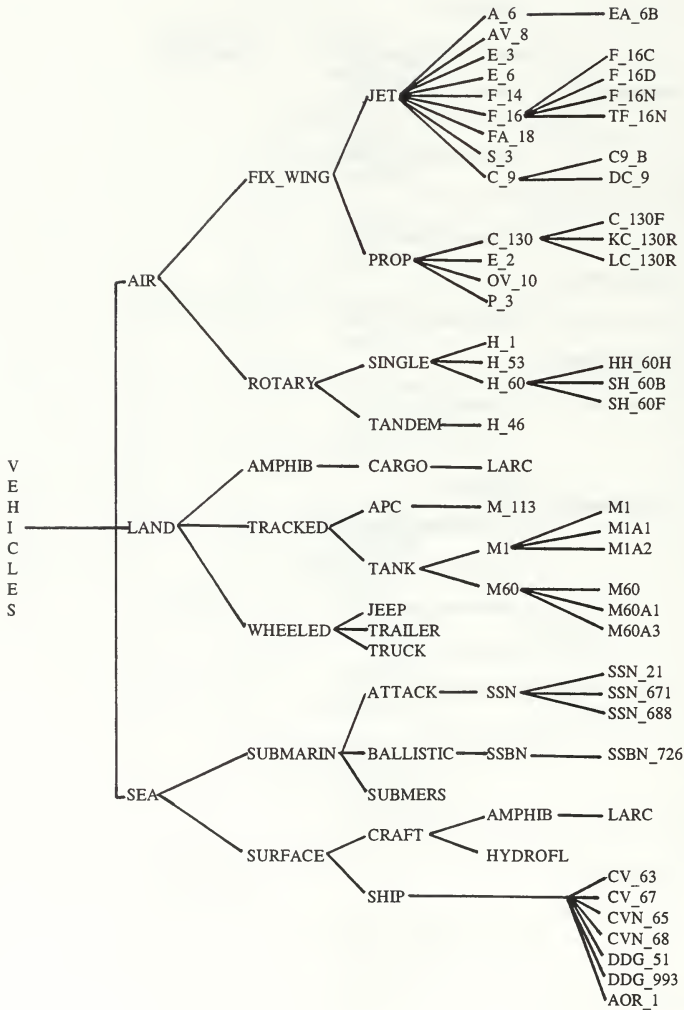

GLOSSARY

abstract data type: A user-oriented construct; a user defined data type that is not built into the programming language.

abstraction: Defining new data types; designing a class to define an abstract data type.

aggregate: A collection, as in an **aggregate** of data members.

base class: A class from which other classes are derived. The derived class inherits all of the characteristics of the base class. See *superclass*.

child record: A database record that is related to higher, or parent, records in the database.

class: A user-defined data type consisting of data members and member functions.

class hierarchy:: A system, or data lattice, of base and derived classes.

data language: A language used to write transactions which refer to the data stored in a database that is managed by a database management system. Also, a language that specifies the processing, integrity and security requirements in a database.

data member: A data component of an object-oriented class; any valid data type.

data model: A database design that enables the user to specify a database in terms of abstract and concrete features about types, aggregates, and relationships of data stored in the database.

database: Stored data; a unification of several otherwise distinct data files to support a common application.

database management: Storage and retrieval of data in a database.

database management system: The software that handles all storage and retrieval of data in a database.

derived class: A class that inherits all of the characteristics of the base class. See *subclass*.

element: A single piece of data; one item of a data type. Collections of them form files in a database. See **record**.

encapsulation: Defining data type representation and behavior in an encapsulated entity; defining a class by binding its data members and functions together. Encapsulation implies that the implementation is transparent to the user, while the interface is visible to the user.

file: A collection of records of a common database format.

hierarchical data model: A database design of parent and child records that emulates an inverted tree structure, in which each parent record may have multiple child records, but each child record may have only one parent record. A child record may have parent-to-lower-child records relationship, forming a multiple-level hierarchy.

inheritance: Deriving a new data type from an existing one; the ability for a subclass to inherit both data attributes and methods from previously defined objects in a nested or hierarchical fashion. Also referred to as subclassing.

instance: An object that has state, behavior and identity. Also, an object that has been described by a class; the object is called the **instance** of that class.

network data model: A database design of parent and child records that emulates a lattice structure in which each parent record may have multiple child records and each child record may have multiple parent records. A child record may have a parent-to-lower-child records relationship, forming a multiple level network.

object: An instance of a data type, including standard object-oriented programming language data types as well as objects of classes.

object data model: A database design of a collection of persistent objects.

object-oriented: Containing the properties of abstraction, encapsulation, inheritance and polymorphism; also, defining abstract data types, instantiating objects, and sending messages to the object's methods.

object-oriented database management system: The software that allows the user to use and maintain the objects in an object-oriented database.

parent record: a database record that is related to lower, or child, records in the database.

persistence: The ability of an object to succeed its creator and to subsequently exist in space other than the space in which it was created. Also, the property of being written to storage and then retrieved.

pointer: A variable used to hold values that are the addresses of objects in memory. A pointer references an object indirectly, and can manage objects allocated during program execution.

polymorphism: Customizing the behavior of a derived data type; exhibition by the methods in a class hierarchy of different behavior for the same message, depending on the type of the object for which the method is invoked, and without regard to the class type of the object reference.

primary key: A key data field whose value uniquely identifies a given record in a database file.

record: A group of related data elements that form to support one functional aspect of a database's application. A collection of records of common format is a *file*.

relational data model: A database design that represents data as tables of rows and columns. Any relationships between tables are formed by common values in common columns.

relationship: An association that links data records together.

secondary key: a key data value that indexes a file on other than its primary key. The value of a secondary key does not have to be unique. Multiple records can have the same secondary key value. When a secondary key is the primary key of another file, the two files have a many-to-one relationship.

subclass: See *derived class*.

superclass: See *base class*.

type: Enumeration of a data member in the database. In object-oriented design, refers to the **type** of a program constant or variable, which can be of a primitive or an abstract data type.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	1488	1489	1490	1491	1492	1493	1494	1495	14
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----

REFERENCES

- [Bert91] E. Bertino and L. Martino. "Object-Oriented Database Management Systems: Concepts and Issues," *IEEE Computer*, Apr 1991, pp 33-47.
- [Booc91] G. Booch. *Object-Oriented Design: With Applications*. Benjamin/Cummings Publishing Co, Redwood City, CA, 1991.
- [Date81] C. J. Date. *An Introduction to Database Systems*. Addison-Wesley Publishing Co, Reading, MA, 1981.
- [dePa91] E. G. de Paula and M. L. Nelson. *Clustering, Concurrency Control, Crash Recovery, Garbage Collection, and Security in Object-Oriented Database Management Systems*. Naval Postgraduate School, Monterey, CA, Feb 1991.
- [Elma89] R. Elmasri and S. B. Navathe. *Fundamentals of Database Systems*. Benjamin/Cummings Publishing Co, Redwood City, CA, 1989.
- [Higa92] K. Higa, M. Morrison, J. Morrison and O. Sheng. "An Object-Oriented Methodology for Knowledge Base/Database Coupling," *Communications of the ACM*, Vol 36, No 6, Jun 1992, pp 99-101.
- [Hsia91] D. K. Hsiao. "The Object-Oriented Database Management: A Tutorial on its Fundamentals," Naval Postgraduate School, Monterey, CA, Aug 1991.
- [Hsia92] D. K. Hsiao. "Federated Databases and Systems: Part I - A Tutorial on Their Data Sharing," *VLDB Journal*, Vol 1, Aug 1992, pp 127-179.
- [Osbo91] W. D. Osborne. *NPSNET: An Accurate Low-Cost Technique for Real-Time Display of Transient Events: Vehicle Collisions, Explosions and Terrain Modifications*. M.S. Thesis, Naval Postgraduate School, Monterey, CA, Sep 1991.
- [Stev92] A. Stevens. *C++ Database Development*. MIS:Press, New York, NY, 1992.

[Zyda92] M. J. Zyda and D. R. Pratt. "NPSNET Digest: A Look at a 3D Visual Simulator for Virtual World Exploration and Experimentation," Naval Postgraduate School, Monterey, CA, Jun 1992.

[Zyd92] M. J. Zyda, D. R. Pratt, J. G. Monahan and K. P. Wilson. "NPSNET: Constructing a 3D Virtual World," *Proceedings of the 1992 Symposium on Interactive 3D Graphics (in cooperation with ACM SIGGRAPH)*, Cambridge, MA, Mar-Apr 1992, pp 147-156.

[Zyda93] M. J. Zyda, D. R. Pratt and K. M. Kelleher. "1992 NPSNET Research Group Overview," Naval Postgraduate School, Monterey, CA, Mar 1993.

INITIAL DISTRIBUTION LIST

- | | | |
|----|---------------------------------------|---|
| 1. | Defense Technical Information Center | 2 |
| | 8725 John J. Kingman Road, Suite 0944 | |
| | Fort Belvoir, Virginia 22060-6218 | |
| 2. | Dudley Knox Library | 2 |
| | Naval Postgraduate School | |
| | 411 Dyer Road | |
| | Monterey, California 93943-5101 | |
| 3. | Electronic Systems Center | 2 |
| | 66 SPTG/SCXI | |
| | 50 Griffiss Street | |
| | Hanscom Air Force Base, MA 01731-1621 | |
| 4. | LCDR Susan C. Borden Davis | 2 |
| | Naval War College (CNC&S) | |
| | Newport, RI 02841 | |
| 5. | Mr. Lawrence L. Borden | 1 |
| | 39 Mountain Drive | |
| | Pittsfield, MA 01201 | |

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93943-5101

DUDLEY KNOX LIBRARY



3 2768 00323144 0